

533,269

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/040096 A1

- (51) International Patent Classification⁷: **E21B 10/56**, 29/06
- (74) Agents: **DONALD, HEATHER**, June et al.; Spoor & Fisher, P.O. Box 41312, 2024 Craighall (ZA).
- (21) International Application Number: **PCT/IB2003/003921**
- (22) International Filing Date: **12 September 2003 (12.09.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **2002/8778** 30 October 2002 (30.10.2002) **ZA**
- (71) Applicant (for all designated States except US): **ELEMENT SIX (PROPRIETARY) LIMITED [ZA/ZA]**; Debid Road, Nuffield, 1559 Springs (ZA).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **TANK, Klaus [ZA/ZA]**; 9 Warbleton Avenue, Essexwold, 2001 Johannesburg (ZA). **CHAPMAN, Raymond, Albert [ZA/ZA]**; 183 Columbine Avenue, Mondeor, 2001 Johannesburg (ZA). **ACHILLES, Roy, Derrick [ZA/ZA]**; 608 San Martinho, Leicester Road, 2007 Bedfordview (ZA).
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **COMPOSITE TOOL INSERT**

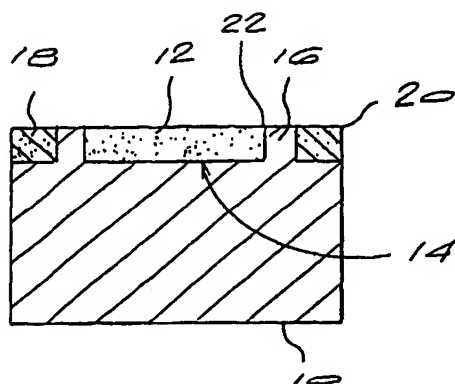

(57) Abstract: A tool insert comprises a substrate (10) having a support surface and a support ring extending laterally from the support surface. The support ring is sized to define a recess (14) within the confines thereof and a shelf about the periphery thereof. A layer (12) of ultra-hard abrasive material is located within the recess and bonded to the substrate and the support ring (16), and presents a primary cutting edge (22) for the tool insert. A protective layer (18) is bonded to the shelf about the support ring so as to protect the primary cutting edge. The protective layer provides a secondary cutting edge (20) for the tool insert, the depth of the protective layer being selected so as to be sufficient to protect the primary cutting edge whilst cutting, milling or drilling through a first substance but to expose the primary cutting edge upon encountering a second substance.

WO 2004/040096 A1

COMPOSITE TOOL INSERT

BACKGROUND OF THE INVENTION

THIS invention relates to a tool insert.

The use of diamond compacts, also known as PCD, as cutting elements are well known in the art and used extensively in various cutting, drilling, milling and other abrasive operations due to the high abrasion resistant properties of diamond cutters. The diamond cutters, however, are not always suitable for all substrates encountered. For instance, it is well established that diamond cutters cannot be used satisfactorily for milling or drilling through ferrous substrates such as steel. As a result, the use of diamond cutters in certain down the hole drilling operations is not suitable as milling through a steel casing, which is used to line the vertical borehole or shaft, is required.

As PCD is not suitable for drilling through the steel casing due to reactions with the ferrous materials, an alternative drill bit insert is required. Accordingly, tungsten carbide cutters are typically used in the drill bit to mill through the steel casing. Once through the casing, the tungsten carbide inserts have to be replaced with abrasive resistant cutters such as diamond cutters in order to drill into the bedrock. This means that the drill bit has to be removed and replaced with an appropriate bit. As the drill strings that have to be removed are very long, this is a time consuming exercise that results in costly downtime.

CONFIRMATION COPY

SUMMARY OF THE INVENTION

According to the invention, a tool insert comprises:

a substrate having a support surface and a support ring extending laterally from the support surface, the support ring being sized to define a recess within the confines thereof and a shelf about the periphery thereof;

a layer of ultra-hard abrasive material located within the recess and bonded to the substrate and the support ring, the layer of ultra-hard abrasive material having a top surface, a portion of the periphery of the top surface providing a primary cutting edge for the tool insert; and

a protective layer bonded to the shelf about the support ring so as to protect the primary cutting edge, a periphery of the protective layer providing a secondary cutting edge for the tool insert, the depth of the protective layer being selected so as to be sufficient to protect the primary cutting edge whilst cutting, milling or drilling through a first substance but to expose the primary cutting edge upon encountering a second substance.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in more detail, by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a sectional side view of an embodiment of a tool insert of the invention;

Figure 2 is a plan view of the tool insert of figure 2; and

Figure 3 is a schematic sectional side view of a rotary drill bit in a subterranean rock drilling operation.

DESCRIPTION OF EMBODIMENTS

Referring to figures 1 and 2, of the accompanying drawings, an embodiment of a tool insert of the invention is shown. The tool insert comprises a tungsten carbide substrate 10, a PCD layer 12 located within a recess 14 and surrounded by an annular section or ring 16 of tungsten carbide extending laterally from a support surface 17, and a protective layer or ring 18 surrounding the ring 16.

The protective ring 18 may be formed of a different grade of tungsten carbide to that of the substrate 10 or, alternatively, be formed of tool steel or other appropriate material. The choice of material is dependent on the substance or substrate to be milled, drilled or cut before exposing the PCD layer 12. The protective ring 18 can be formed *in situ* or, alternatively, can be formed as a separate ring component which is attached to the tool insert. The protective ring 18 may be attached to the tool insert, which has been machined to accept the ring, for example by brazing, press fitting, shrink fitting, or any other convenient method.

The protective ring 18 includes a cutting edge 20 for cutting through a first substance or substrate such as the steel casing or lining used in a subterranean drilling operation. The PCD layer 12 includes a cutting edge 22 for cutting through a second substance or substrate such as bedrock. In this arrangement, the tungsten carbide of the substrate 10 and the ring 16 is selected for its properties in forming the PCD layer 12 whilst the protective ring 18 is selected so as to optimize the drilling, milling or cutting through the relevant first substance or substrate. Although the annular ring 16 of tungsten carbide may act as a further protective layer for the cutting edge 22 of the PCD layer 12, its primary function is to optimize the

formation of the PCD layer 12 in a conventional high pressure/high temperature process.

For convenience, the use of the tool insert will be described with regards to its use in the directional drilling of holes in a subterranean bedrock. It is to be understood, however, that the tool insert may be used in any application where a first substance or substrate, which is not suited for cutting, drilling or milling by a PCD cutter, is to be cut, drilled or milled to expose a second substance or substrate to which the PCD cutter is suited.

Referring to figure 3 a drill assembly 30 consists of a rotary drill string 32 and a rotary drill bit 34, of the drag bit kind in this case.

The drill bit 34 is directed down a passage 36 within a steel tubular casing 38. The steel casing 38 is anchored in a borehole or shaft 40 drilled into a subterranean bedrock 42.

In order for the rotary drill bit 34 to drill a horizontal or angled hole into the bedrock 42 in the region indicated by an 'X', it is necessary for the drill bit 34 to be redirected from a vertical direction of movement to a horizontal or angled direction of movement, along the arrow 44. A deflector 46, which is attached to the casing 38 and which has previously been positioned adjacent the region 'X', causes the bit 34 to change direction in this manner. The deflector 46 is supported by an anchor 48.

In order to drill through the casing 38, typically cemented tungsten carbide cutters have traditionally been used. Once a window 50 has been milled through the casing 38, the drill bit 34 is withdrawn and replaced with a drill bit having abrasion resistant cutters such as PCD cutters. This time consuming operation is obviated by using tool inserts or cutters of the invention. The protective layer or ring 18 is used to mill through the casing 38, whereafter it and the support ring 16 are quickly consumed to expose the cutting edge 22 of the PCD layer, which is suited to cutting through the subterranean bedrock.

The layer of ultra-hard abrasive material will generally be a layer of PCD, although it may also be PCBN where the second substrate requires it. The layer may also be a layer of diamond produced by chemical vapour deposition, called CVD diamond.

The substrate of the tool insert will generally be a cemented carbide substrate. Such substrates are well known in the art and are generally cemented tungsten carbide substrates.

The tool insert configuration may, where appropriate, be altered or adapted in different applications, provided that the desired purpose, i.e. of protecting the primary cutting edge of a PCD or PCBN layer whilst milling a window through a first substrate and exposing the PCD or PCBN cutting edge once a second substrate is encountered, is achieved.

CLAIMS**1. A tool insert comprising:**


a substrate having a support surface and a support ring extending laterally from the support surface, the support ring being sized to define a recess within the confines thereof and a shelf about the periphery thereof;

a layer of ultra-hard abrasive material located within the recess and bonded to the substrate and the support ring, the layer of ultra-hard abrasive material having a top surface, a portion of the periphery of the top surface providing a primary cutting edge for the tool insert; and


a protective layer bonded to the shelf about the support ring so as to protect the primary cutting edge, a periphery of the protective layer providing a secondary cutting edge for the tool insert, the depth of the protective layer being selected so as to be sufficient to protect the primary cutting edge whilst cutting, milling or drilling through a first substance but to expose the primary cutting edge upon encountering a second substance.

- 2. A tool insert according to claim 1, wherein the support ring is integrally formed with the substrate.**
- 3. A tool insert according to claim 1 or claim 2, wherein the substrate is a tungsten carbide substrate.**
- 4. A tool insert according to claim 3, wherein the protective layer is formed of tungsten carbide of a different grade to that of the substrate, or of tool steel, or of another suitable material dependent on the first substance to be milled.**


5. A tool insert according to any one of the preceding claims, wherein the protective layer is formed *in situ* during the formation of the tool insert.
6. A tool insert according to any one of the preceding claims, wherein the protective layer is formed as a separate ring component which is bonded to the shelf portion of the support surface of the substrate.

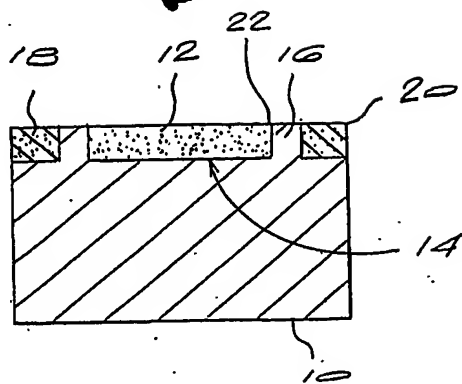

Page 1

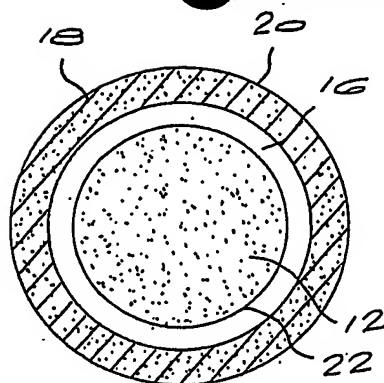

30 2

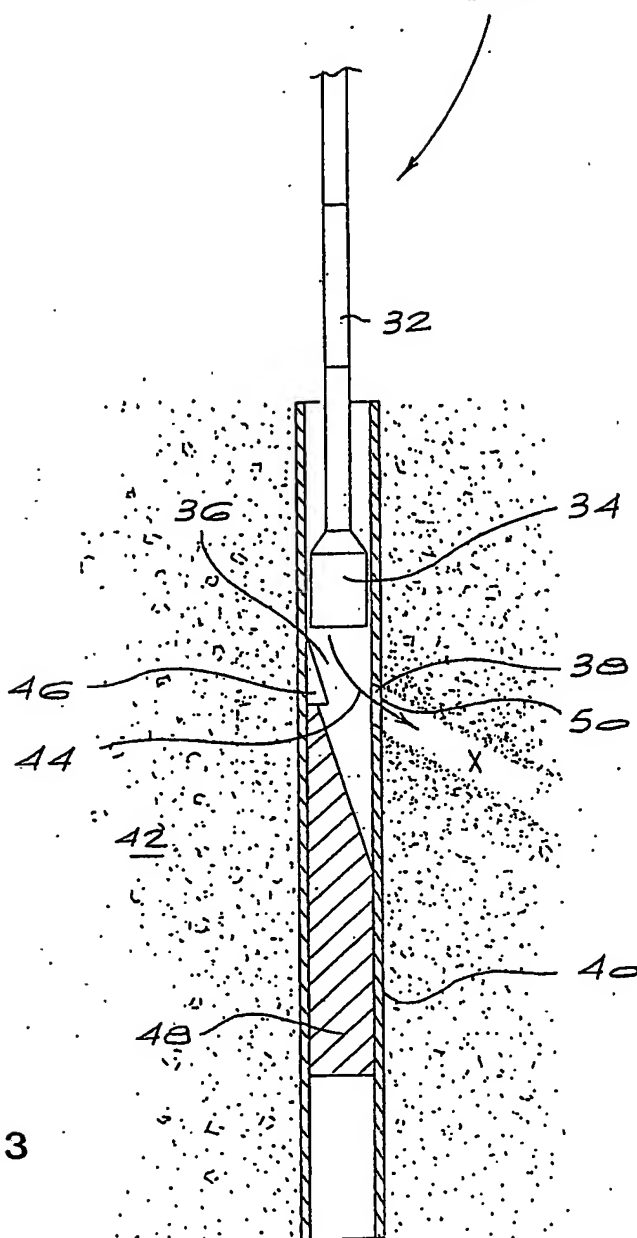

55 3

INTERNATIONAL SEARCH REPORT

PCT/IB 03/03921

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E21B10/56 E21B29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 979 571 A (NAZZAL GREG ET AL) 9 November 1999 (1999-11-09) claim 1; figure 10	1-6
Y	WO 00 36264 A (BEX PHILLIP ALEXANDER ;TANK KLAUS (ZA); DE BEERS IND DIAMOND (ZA)) 22 June 2000 (2000-06-22) page 3, line 12 - line 15; figure 12	1-6
A	US 6 187 068 B1 (FRUSHOUR ROBERT H ET AL) 13 February 2001 (2001-02-13) See abstract figures 9-11	1
A	US 2002/074168 A1 (GRIFFIN NIGEL DENNIS ET AL) 20 June 2002 (2002-06-20) See abstract figures 11B,22B	1
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

16 December 2003

Date of mailing of the international search report

23/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dantinne, P

INTERNATIONAL SEARCH REPORT

PCT/IB 03/03921

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>GB 2 361 936 A (SMITH INTERNAT INC) 7 November 2001 (2001-11-07) See asbtract figures 7-12</p>	1

INTERNATIONAL SEARCH REPORT

PCT/IB 03/03921

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5979571	A	09-11-1999	AU 731033 B2 AU 4593297 A CA 2238628 A1 GB 2323112 A , B NO 982372 A WO 9813572 A1	22-03-2001 17-04-1998 02-04-1998 16-09-1998 24-07-1998 02-04-1998
WO 0036264	A	22-06-2000	AU 1579400 A WO 0036264 A1	03-07-2000 22-06-2000
US 6187068	B1	13-02-2001	NONE	
US 2002074168	A1	20-06-2002	AU 7423001 A AU 8604901 A CA 2423099 A1 CA 2423102 A1 EP 1190999 A2 EP 1191000 A2 EP 1191001 A2 EP 1190791 A2 EP 1324960 A1 EP 1318969 A1 WO 0224603 A1 WO 0224601 A1 NO 20031253 A NO 20031254 A US 2003021995 A1 US 2003034182 A1 US 2003035957 A1 US 2003037640 A1 US 2003035958 A1 US 2002034632 A1 US 2002034631 A1 US 2002033383 A1 US 2002033077 A1 US 2002033282 A1 US 2002045059 A1 ZA 200107478 A ZA 200107479 A CA 2379806 A1 EP 1247787 A1 NO 20021290 A US 2002139584 A1	02-04-2002 02-04-2002 28-03-2002 28-03-2002 27-03-2002 27-03-2002 27-03-2002 27-03-2002 09-07-2003 18-06-2003 28-03-2002 28-03-2002 19-05-2003 19-05-2003 30-01-2003 20-02-2003 20-02-2003 27-02-2003 20-02-2003 21-03-2002 21-03-2002 21-03-2002 21-03-2002 21-03-2002 18-04-2002 12-03-2002 12-03-2002 02-10-2002 09-10-2002 03-10-2002 03-10-2002
GB 2361936	A	07-11-2001	US 6361873 B1 CA 2332603 A1	26-03-2002 08-08-2001